



BW-SM230-245M54


Monocrystalline Solar Module

KEY FEATURES


- Entire module certified to withstand high wind loads (2400 Pascal) and snow loads (5400 Pascal)
- Perfect module self-cleaning capability, reduce power loss caused by dust (soiling effect)
- More elegant cell and module appearance
- Excellent performance in low-light irradiance environment
- High salt mist and ammonia resistance




Premium Performance Warranty

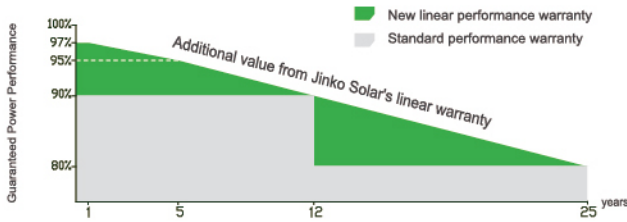


* Based on customer requirements and contract terms



Dimensions

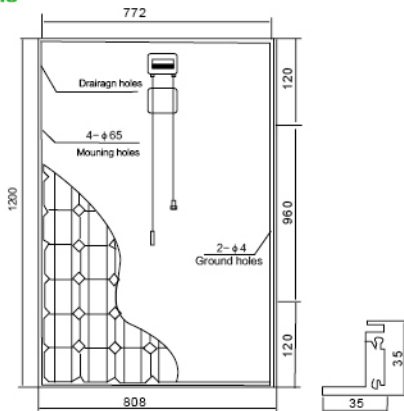

I-V Cures

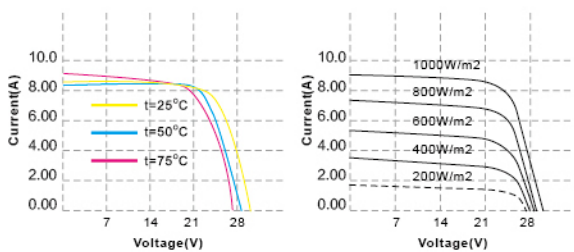

General Data

Cell	Monocrystalline 156mmx156mm
No. of cells	54 in series (6x9)
Weight	15.8kg
Dimensions	1480X992x40(mm)
Produced in accordance with	TUV/IEC 61215/EN 61730

Electrical Data

(STC: Irradiance 1000w/m², module temperate 25OC, AM=1.5)

	230Wp	235Wp	240Wp	245Wp
Power	230Wp	235Wp	240Wp	245Wp
Open circuit voltage	32.4V	32.4V	32.4V	32.4V
Maximum power voltage	27V	27V	27V	27V
Short circuit current	9.37A	9.57A	9.77A	9.98A
Maximum power current	8.51A	8.70A	8.88A	9.07A
Module Conversion Efficiency	15.66%	16.00%	16.34%	16.69%
Maximum system voltage	1000V			
Operating temperature	-40OC to +90OC			
NOCT	45OC ± 2OC			
Temperature coefficient of Isc	+0.05%/OC			
Temperature coefficient of Voc	-0.34%/OC			
Temperature coefficient of Pm	-0.5%/OC			

Specifications included in this datasheet are subject to change without prior notice.